

NCE N-Channel Super Trench Power MOSFET

Description

The NCEP12T15 uses **Super Trench** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{\text{DS(ON)}}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

General Features

- $V_{DS} = 120V, I_D = 150A$ $R_{DS(ON)} < 4.2 \text{m}\Omega @ V_{GS} = 10V$
- Excellent gate charge x R_{DS(on)} product
- Very low on-resistance R_{DS(on)}
- 175 °C operating temperature
- Pb-free lead plating
- 100% UIS tested


Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

100% UIS TESTED!

100% ΔVds TESTED!

Package Marking and Ordering Information



Schematic diagram



Marking and pin assignment



TO-220-3L top view

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity	
NCEP12T15	NCEP12T15	TO-220-3L	-	-	_	

Absolute Maximum Ratings (T_C=25 ℃ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V _{DS}	120	V
Gate-Source Voltage	V _G s	±20	V
Drain Current-Continuous	I_D	150	А
Drain Current-Continuous(T _C =100℃)	I _D (100℃)	120	Α
Pulsed Drain Current	I _{DM}	600	Α
Maximum Power Dissipation	P _D	260	W
Derating factor		1.73	W/℃
Single pulse avalanche energy (Note 5)	E _{AS}	1500	mJ
Drain Source voltage slope, V _{DS} ≤96 V,	dv/dt	50	V/ns
Reverse diode dv/dt, V _{DS} ≤96V, I _{SD} <i<sub>D</i<sub>	dv/dt	15	V/ns
Operating Junction and Storage Temperature Range	T_{J} , T_{STG}	-55 To 175	$^{\circ}$

NCEP12T15

Thermal Characteristic

Thermal Resistance,Junction-to-Case ^(Note 2)	$R_{ heta JC}$	0.58	°C/W	
---	----------------	------	------	--

Electrical Characteristics (T_C=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	120		-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =120V,V _{GS} =0V	-	-	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V,V _{DS} =0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_{D}=250\mu A$	2.8	3.4	4.0	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =75A	-	3.5	4.2	mΩ
Forward Transconductance	g FS	V _{DS} =10V,I _D =75A	75	-	-	S
Dynamic Characteristics (Note4)	<u> </u>		•			
Input Capacitance	C _{lss}	\/ -50\/\/ -0\/	-	7900	-	PF
Output Capacitance	C _{oss}	V_{DS} =50V, V_{GS} =0V, F=1.0MHz	-	723	-	PF
Reverse Transfer Capacitance	C _{rss}	r=1.0lvln2	-	48	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	t _{d(on)}		-	25	-	nS
Turn-on Rise Time	t _r	V_{DD} =60 V , I_D =75 A	-	80	-	nS
Turn-Off Delay Time	t _{d(off)}	V_{GS} =10 V , R_{G} =4.7 Ω	-	52	-	nS
Turn-Off Fall Time	t _f		-	17	-	nS
Total Gate Charge	Qg	\/ CO\/ 75A	-	111		nC
Gate-Source Charge	Q_{gs}	$V_{DS}=60V,I_{D}=75A,$	-	46		nC
Gate-Drain Charge	Q_{gd}	V _{GS} =10V	-	24		nC
Drain-Source Diode Characteristics	- 1		•			
Diode Forward Voltage (Note 3)	V _{SD}	V _{GS} =0V,I _S =150A	-		1.2	V
Diode Forward Current (Note 2)	Is		-	-	150	Α
Reverse Recovery Time	t _{rr}	$T_J = 25^{\circ}C$, $I_F = I_S$	-	75		nS
Reverse Recovery Charge	Qrr	$di/dt = 100A/\mu s^{(Note3)}$	-	168		nC


Notes:

- ${\it 1. Repetitive Rating: Pulse width limited by maximum junction temperature.}\\$
- 2. Surface Mounted on FR4 Board, $t \le 10$ sec.
- 3. Pulse Test: Pulse Width \leq 300 μ s, Duty Cycle \leq 2%.
- 4. Guaranteed by design, not subject to production
- 5. EAS condition : Tj=25 $^{\circ}$ C,V_{DD}=50V,V_G=10V,L=0.5mH,Rg=25 Ω




Test Circuit


1) E_{AS} test Circuit

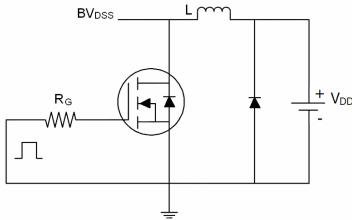

2) Gate charge test Circuit

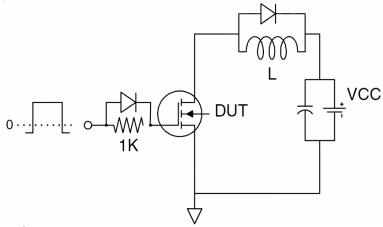

3) Switch Time Test Circuit

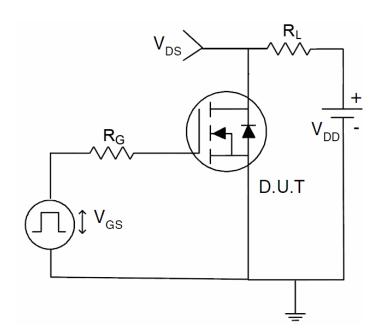



Typical Electrical and Thermal Characteristics

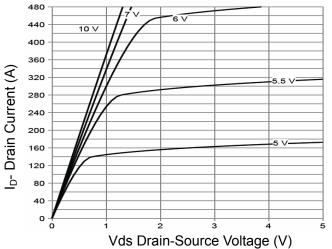


Figure 1 Output Characteristics

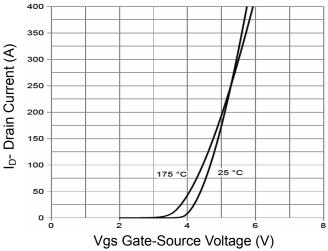


Figure 2 Transfer Characteristics

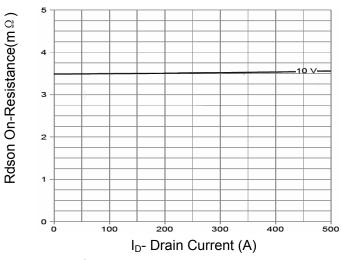


Figure 3 Rdson- Drain Current

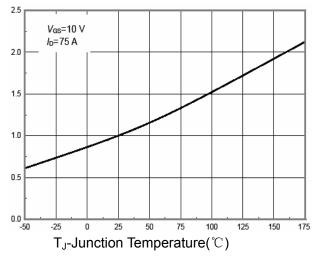


Figure 4 Rdson-JunctionTemperature

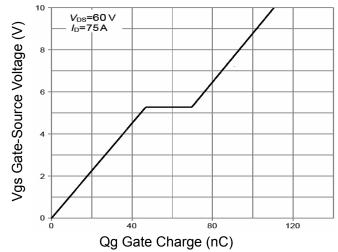


Figure 5 Gate Charge

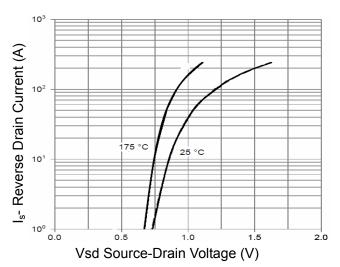
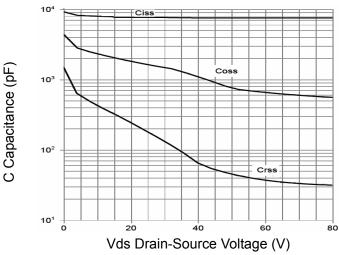


Figure 6 Source- Drain Diode Forward





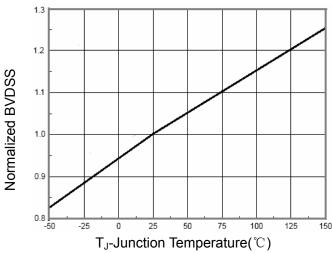
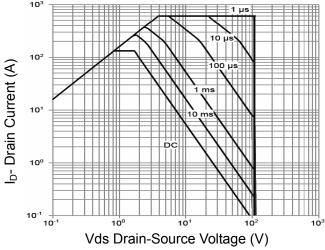


Figure 7 Capacitance vs Vds

Figure 9 BV_{DSS} vs Junction Temperature



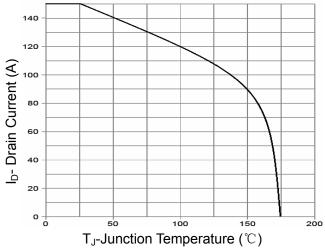


Figure 8 Safe Operation Area

Figure 10 Current De-rating


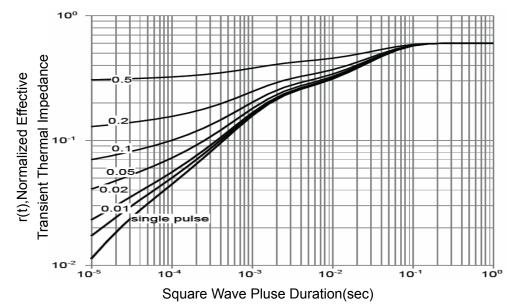


Figure 11 Normalized Maximum Transient Thermal Impedance



TO-220-3L Package Information

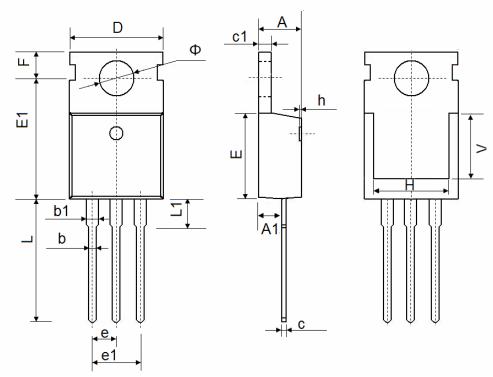

Symbol	Dimensions	In Millimeters	Dimensions In Inches		
Symbol	Min.	Max.	Min.	Max.	
A	4.400	4.600	0.173	0.181	
A1	2.250	2.550	0.089	0.100	
b	0.710	0.910	0.028	0.036	
b1	1.170	1.370	0.046	0.054	
С	0.330	0.650	0.013	0.026	
c1	1.200	1.400	0.047	0.055	
D	9.910	10.250	0.390	0.404	
Е	8.9500	9.750	0.352	0.384	
E1	12.650	12.950	0.498	0.510	
е	2.54	0 TYP.	0.100	TYP.	
e1	4.980	5.180	0.196	0.204	
F	2.650	2.950	0.104	0.116	
Н	7.900	8.100	0.311	0.319	
h	0.000	0.300	0.000	0.012	
L	12.900	13.400	0.508	0.528	
L1	2.850	3.250	0.112	0.128	
V	7.500 REF.		0.295 REF.		
Ф	3.400	3.800	0.134	0.150	



Attention:

- Any and all NCE power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE power representative nearest you before using any NCE power products described or contained herein in such applications.
- NCE power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE power products described or contained herein.
- Specifications of any and all NCE power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE power product that you intend to use.
- This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.